

BOQ Construction of 50 MT Godown with office building at Suguda PACS

Sl. No.	Items	Unit	Quantity	Rate	Amount
1	Earth work excavation in hard soil within initial lead and lift as per the direction of the Engineer-in-charge.	cum	65.25	281.71	18381.58
2	Filling in foundation and plinth with sand well watered and rammed,etc.	Cum	107.47	442.91	47600.00
3	Cement concrete (1:3:6) with 4cm size hard granite crusher broken metal,etc.	Cum	22.75	6426.35	146199.00
4	Flyash Brick masonry in cement mortar (1:6) in foundation and plinth.	Cum	40.13	5979.44	239955.00
5	Flyash Brick masonry in cement mortar (1:6) in Superstructure,etc.	Cum	53.38	6012.77	320962.00
6	R.C.C.M-20 using 20 mm and down graded hard granite crusher broken chips,etc.				
a	Column base	Cum	8.64	6584.05	56886.00
b	Plinth band	Cum	5.71	7050.70	40259.00
c	Column & Beam	Cum	13.08	15567.55	203624.00
d	Lintel	Cum	5.12	11133.97	57006.00
e	Chajja / Roof slab	Cum	8.43	11549.05	97358.00
7	Supplying,fitting & placing uncoated HYSD bar reinforcement including all cost & carriage including labour charges,etc.	Qntl	38.12	8829.54	336582.00
8	CC (1:2:4) With 12mm C.B Chips	Cum	9.87	7556.69	74585.00
9	6 mm.thick cement plaster in C.M.(1:4) for ceiling plaster including deep chiping,etc.	Sqm	0.00	184.28	0.00
10	16 mm thick cement plaster in C.M.(1:6) in internal surface of wall,etc.	Sqm	259.11	287.67	74538.00
11	12 mm thick cement plaster in C.M.(1:6) in external surface of wall,etc.	Sqm	442.92	219.03	97013.00
12	Supplying fitting &fixing of MS Door & Window including all cost of material & Laour charges,etc.	Kg	797.58	73.30	58463.00
13	Supplying fitting &fixing of PVC Door including all Cost & labour as per direction of E.I.C. (L.S.)	Each		5500.00	0.00
14	Supplying, fitting and fixing vetrified tile in dados of size 600mm x 600mm of approved make conforming to IS :13755 laid on 12 mm thick cement mortar (1:3) and filling joints with white cement of approved quality including cost of all work all materials, taxes, labour, T&P , etc. complete as per direction of Engineer-in-charge.	Sqm	6.98	1067.73	7453.00
15	Supplying, fitting and fixing vetrified tile in floors of size 600mm x 600mm of approved make conforming to IS :13755 laid on 20 mm thick cement mortar (1:4) and filling joints with white cement of approved quality including cost of all work all materials,taxes,labour, T&P ,etc. complete as per direction of Engineer-in-charge.	Sqm	39.56	1067.73	42239.00
16	M.S Shutter made out of M.S angle and sheet	Sqm	4.44	3600.90	15988.00
17	Supplying fitting and fixing of M.S Tubular truss & purlin including all cost , carriage etc (market rate)	Qntl	15.00	12507.10	187607.00

18	Manufacturing , supplying (50mmx100mmx50mm) 5mm C channel purlin, runner and fender to plinth band (angular) including fabrication and fixing in position as directed by engineer in charge	Qntl	10.00	7935.30	79353.00
19	Cost , supplying and labour for fixing of anticorrosive zinc aluminium alloy painted coloured steel roofing profile sheet of 0.45 mm thick in roof of godown including fixing of ridge caps with fasteners of approved specifications	Sqm	71.80	1007.40	72331.00
20	Supplying fitting and fixing of Holding down bolts (600mmx20mm) & base plate of 8 mm thickness including all cost , carriage etc (market rate)	nos.	12.00	97.80	1174.00
21	Finishing walls with waterproofing cement paints	sqm	201.51	63.03	12701.00
22	Anti termite treatment in foundations , trenches , flooring with approved chemicals	Sqm	95.40	112.70	10752.00
23	Labour charges for fixing glass strips of depth 0.05m in joints in floor including cost of glass per 1 metre	Sqm	6.00	696.40	4178.00
24	Supplying fitting and fixing of Steel ventilator glazed composite with M.S grill outside iron frame with glass pairs including supplying and fixing of putty & wire clips, screw & nails & cost of materials (market rate)	Sqm	3.60	3380.20	12169.00
25	Two coats of enamel painting over one coat of primer to doors and windows, etc.	Sqm	256.05	231.71	59329.00
26	Finishing walls with Oil 'bound cement primer one coat to plaster surfaces, etc.	Sqm	563.95	78.91	44501.00
27	Two coats of plastic emulsion paint of approved quality to in side finishing area, etc.	Sqm	563.95	111.14	62677.00
28	Cost of pre cast ventilators and bathroom door	nos.	1.00	1200.00	1200.00
Total =				Rs	2483063.58
Grand Total =				Rs	2483064
Rupees (Twenty four lakhs Eighty three thousand Sixty Four rupees) only.					


Total No. of pages (Enclosed) other than DTCN _____ pages.

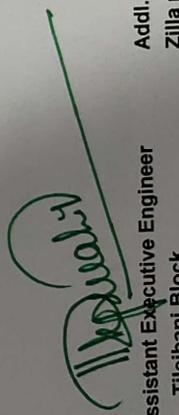
Notes:-Contractor should not write anything except quoting of Percentage, Excess/ Less /Equal to the total CONDITIONS:-All Materials, Labour, Machineries and Equipments required to complete the work in all respect be N.B:-GST, Income Tax, Royalties, Labour Cess as applicable will be deducted from the bill of the Contractor. For all above works the minimum grade of cement OPC, TMT High strength steel Fe-500.


My/Our quoted rate is _____ % Excess over/Less than/Equal to the above tendered amount of Rs. _____

only (both in figures and words).

Signature of Contractor


Block Development Officer
Tileibani Block


Assistant Executive Engineer
Tileibani Block


Junior Engineer
Tileibani Block

Addl. Executive officer (Tech)
Zilla parishad , Deogarh